
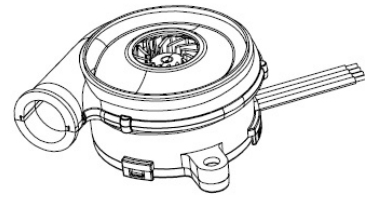
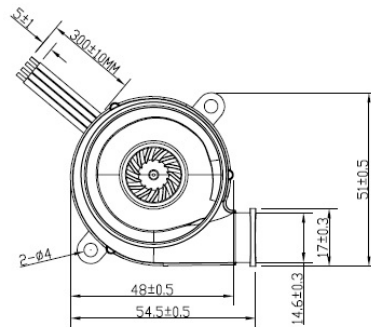



Super high pressure blower

RoHS

CZ-BA5025A

ize : 54.5 x 51 x 24.9mm



LEAD WIRE UL 1007 22AWGOR EQUIVALENT

PIN1: BLACK WIRE—(-)

PIN2: RED WIRE—(+)

PIN3:YELLOW WIRE—(FG)

PIN4:BLUE WIRE—(PWM)

IMP LL	Thermoplastic PBT, UL94V-0		HOU I	Thermoplastic PBT, UL94V-0					
B A I	BB		Operating Temperature	-10°C~60°C					
Dielectric Strength	5mA Max 500VAC 1minute		Weight	150g					
Insulation Resistance	10MΩ Min at 500VDC		IP	IP21					
Model	ate Voltage	atedc rrent	Power	ated speed	Max press re	Max Air low		oise	
	(v)	(A)	(W)	(rpm)	inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	dB(A)@1M
H12B	12	2.5	30	40000	19.27	489	10.62	0.3	67.2
H24B	24	1.25	30	40000	19.27	489	10.62	0.3	67.2

風壓單位: mmHg 毫米水

37.44

