




高圧DCブロー


RoHS 適合

寸法： 54.5 x 51 x 24.9mm

DSB5525-TK

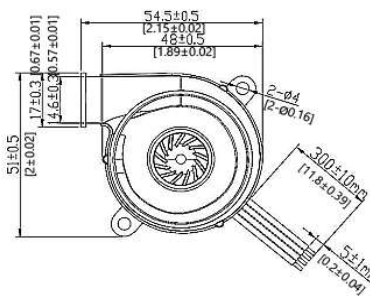

UNIT : mm[inch]



LEAD WIRE UL 1007 22AWGOR EQUIVALENT

- 1: BLACK WIRE--(-)
- 2: RED WIRE--(+)
- 3:YELLOW WIRE--( FG)
- 4:BLUE WIRE--( PWM)

インペラー	プラスチック、UL94V-0			ハウジング	プラスチック、UL94V-0				
ベアリング	BB			動作温度	-10°C~60°C				
耐電圧	5mA Max 500VAC 1分間			重量	150g				
絶縁抵抗	10MΩ Min at 500VDC			IP	IP21				
型番	定格電圧	定格電流	入力	定格回転数	最大圧力		最大風量		騒音
	(v)	(A)	(W)	(rpm)	inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	dB(A)@1M
V12HB-TK	12	2.5	30	40000	19.27	489	10.62	0.3	67.2
V24HB-TK	24	1.25	30	40000	19.27	489	10.62	0.3	67.2

