


Super pressure DC radial blowers

RoHS

DSB7247-TK

Dimension : 72 x 76 x 47mm

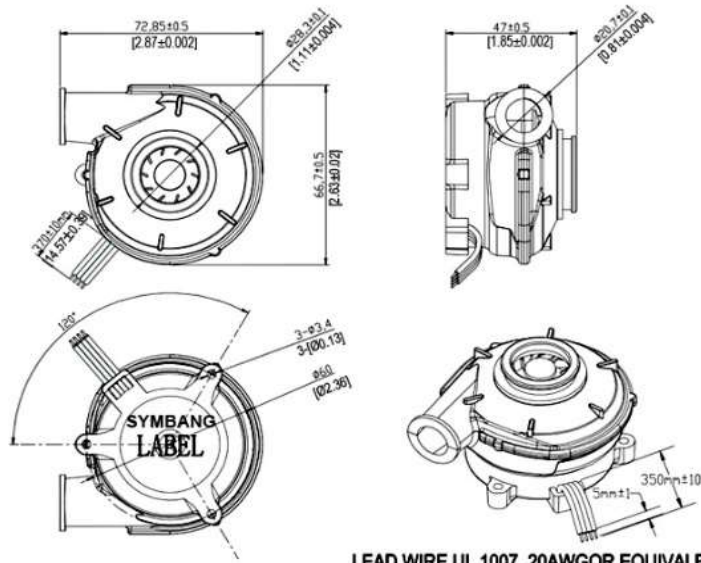

UNIT: mm [inch]

LEAD WIRE UL 1007 20AWG OR EQUIVALENT

1: BLACK WIRE—(-)

2: RED WIRE—(+)

LEAD WIRE UL 1007 22AWG OR EQUIVALENT

3: YELLOW WIRE—(FG)

4: BLUE WIRE—(PWM)

IMPELLER	Thermoplastic PBT, UL94V-0			HOUSING	Thermoplastic PBT, UL94V-0				
Bearing	BB			Operating Temperature	-10°C~60°C				
Dielectric Strength	5mA Max 500VAC 1minute			Weight	163.7g				
Insulation Resistance	10MΩ Min at 500VDC			IP	IP21				
Model	Rated Voltage	Rated current	Input Power	Rated speed	Max Air pressure		Max Air flow		Noise
	(v)	(A)	(W)	(rpm)	inchH ₂ O	mmH ₂ O	CFM	m ³ /min	dB(A)@1M
V12HB-TK	12	6	72	37000	29.05	737.3	17.99	0.509	71.5
V24HB-TK	24	3	72	37000	29.05	737.3	17.99	0.509	71.5

