
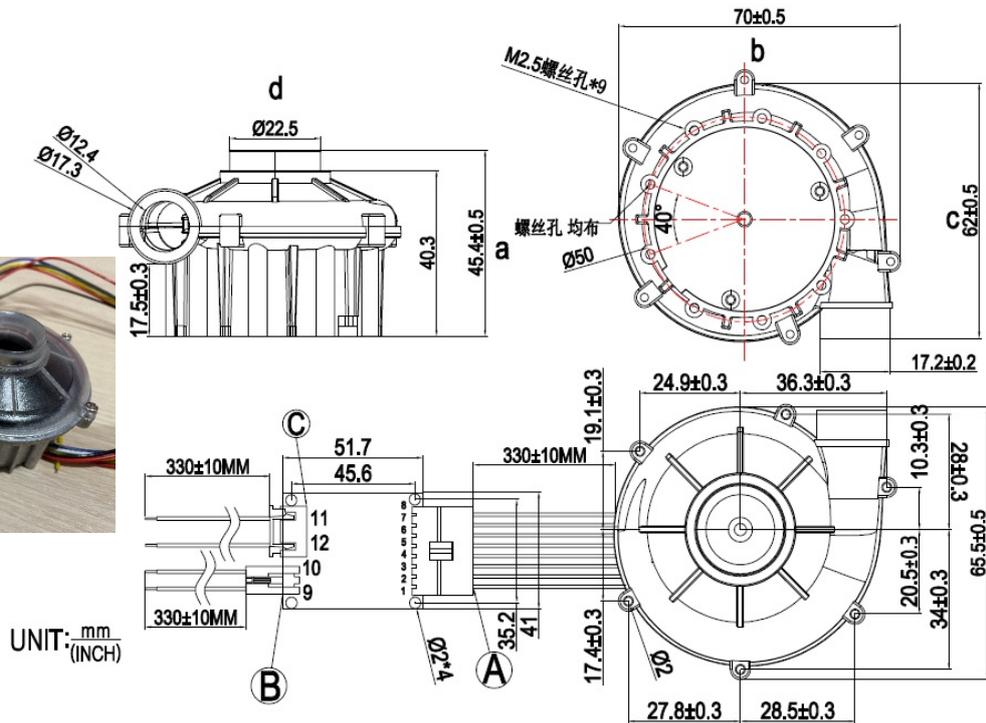


高圧DCブロー

CZ-BA7050B

RoHS 適合

寸法： 67 x 62 x 46mm

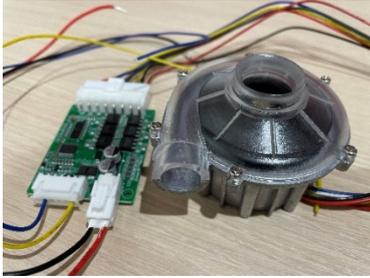


UNIT: mm  
(INCH)

**B:VH3.96-2P端子**  
 LEAD WIRE UL 1007# 20AWGOR EQUIVALENT  
 PIN9:RED WIRE—(+)  
 PIN10:BLACK WIRE—(-)

**C:2.54-6P端子**  
 LEAD WIRE UL 1007#24AWGOR EQUIVALENT  
 PIN11:BLUE WIRE—(PWM)  
 PIN12:YELLOW WIRE—(FG)

重点管控尺寸 a-d

**A:VH3.96-8P端子**  
 LEAD WIRE UL 1332# 22AWGOR EQUIVALENT  
 PIN1: RED WIRE—(W)  
 PIN2: BLACK WIRE—(V)  
 PIN3: YELLOW WIRE—(U)  
 LEAD WIRE UL 1007# 24AWGOR EQUIVALENT  
 PIN4: BLACK WIRE—(GND)  
 PIN5: WHITE WIRE—(HW)  
 PIN6: BLUE WIRE—(HV)  
 PIN7: YELLOW WIRE—(HU)  
 PIN8: RED WIRE—(H5V)

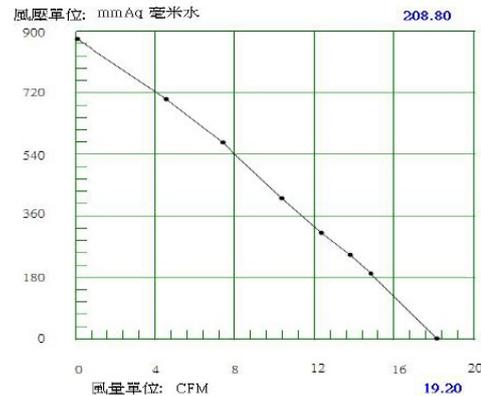

インペラー	プラスチック		ハウジング		プラスチック, アルミ				
ベアリング	BB		動作温度		-10°C~60°C				
耐電圧	5mA Max 500VAC/min		重量		172.4g				
絶縁抵抗	10MΩ Min at 500VDC/min		IP		IP21				
型番	定格電圧	定格電流	入力	定格回転数	最大圧力		最大風量		騒音
	(v)	(A)	(W)	(rpm)	inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	dB(A)@1M
H24B	24	2.9	67	35000	34.48	876	18.14	0.513	70.1