


DC遠心ファン

DCF10025-TK

RoHS 適合

寸法： 100 x 25mm

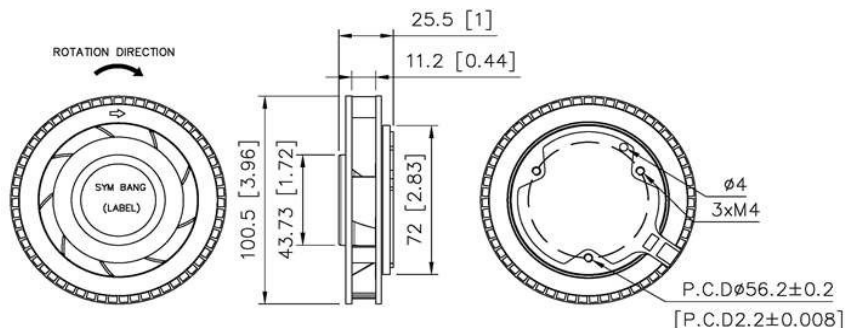

UNIT: mm[inch]

インペラー	熱可塑性樹脂 PBT、UL94V-0			ハウジング	熱可塑性樹脂 PBT、UL94V-0				
ベアリング	BB			動作温度	-10°C~70°C				
耐電圧	5mA Max 500VAC 1秒間			重量	121g				
絶縁抵抗	10MΩ Min at 500VDC			IP	IP21				
型番	定格電圧	定格電流	入力	定格回転数	最大静圧		最大風量		騒音
	(v)	(A)	(W)	(rpm)	inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	dB(A)@1M
V12SM B-TK	12	0.53	6.36	4500	0.933	23.69	43.5	1.232	55.9
V12SLB -TK	12	0.47	5.64	4000	0.829	21.06	38.6	1.093	49.7
V12HB-TK	12	0.41	4.92	3500	0.725	18.42	33.8	0.957	43.5
V12MB -TK	12	0.35	4.2	3000	0.622	15.79	29	0.821	37.2
V12LB-TK	12	0.29	3.48	2500	0.518	13.16	24.1	0.682	31
V24SM B-TK	24	0.27	6.48	4500	0.933	23.69	43.5	1.232	55.9
V24SLB -TK	24	0.24	5.76	4000	0.829	21.06	38.6	1.093	49.7
V24HB-TK	24	0.21	5.04	3500	0.725	18.42	33.8	0.957	43.5
V24MB -TK	12	0.18	4.32	3000	0.622	15.79	29	0.821	37.2
V24LB-TK	24	0.15	3.6	2500	0.518	13.16	24.1	0.682	31

