
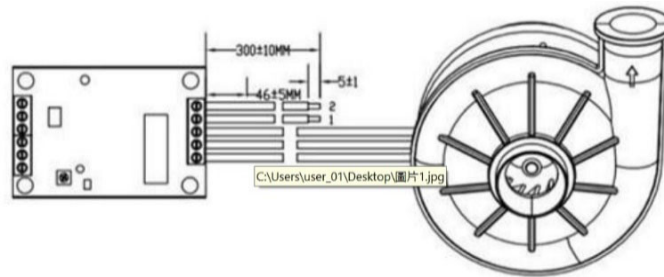
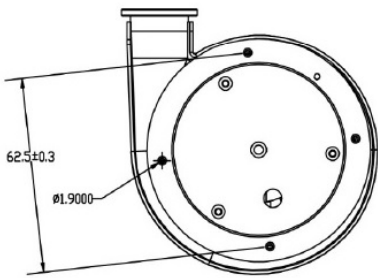
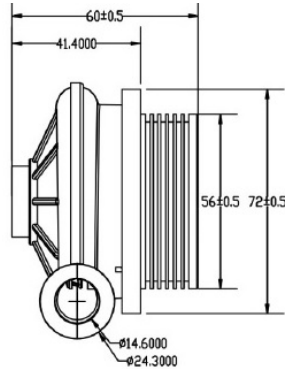


高圧DCブローア

寸法： 77 x 79 x 60mm

RoHS 適合

CZ-BA8060B

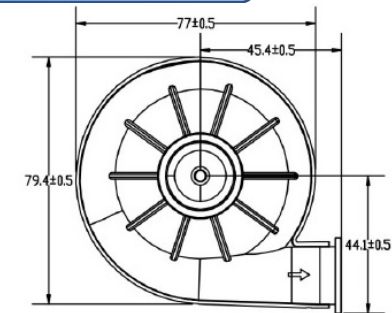

LEAD WIRE UL 1332 18AWGOR EQUIVALENT
 PIN1: RED WIRE—(+)
 PIN2: BLACK WIRE—(-)

インペラー	プラスチック	重量	394g
ベアリング	BB	ハウジング	プラスチック
		動作温度	-10°C~60°C

型番	定格電圧 (v)	定格電流 (A)	入力 (W)	定格回転数 (rpm)					
					mmAq	CFM	A	Watt	
H24B	24	12	288	47000	1	1681.25	-0.01	8.5	204
	最大圧力	最大風量		騒音	2	1514.25	6.02	8.5	204
					3	1366.5	10.72	8.5	204
	mmH ₂ O	CFM	m ³ /min	dB(A)@1M	4	1083.25	16.66	8.5	204
	1991	34.68	0.981	88.4	5	867.5	20.5	8.5	204
				6	692.25	23.7	8.5	204	
				7	541	25.82	8.5	204	
				8	0	33.79	8.5	204	

